


# BL2-58



## Features

- Small footprint and lightweight (265g approx.)
- 80mm/sec (max.) printing speed
- 58mm paper width
- Drop-in paper loading
- Label printing (option)
- Operation by Li-ion battery or AC adapter (Optional battery required)
- Built in internal battery charger
- wall-mount vertical installation available

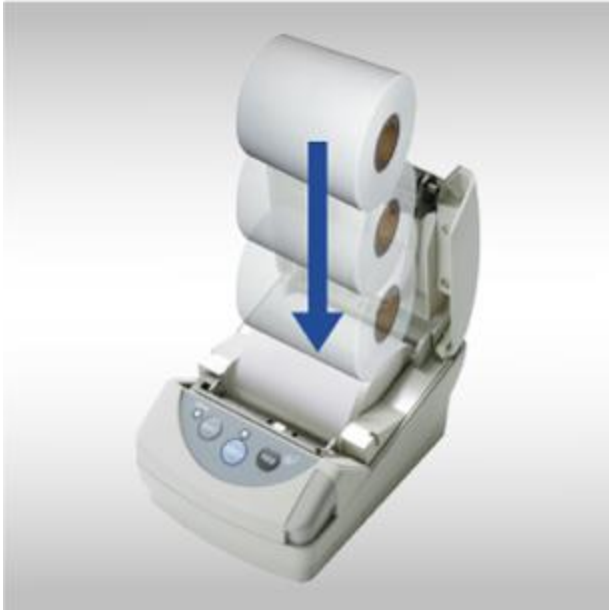

## Printer model

## Specifications

<b>Printing method</b>	Direct line thermal
<b>Number of dots</b>	384dots
<b>Resolution</b>	8dots/mm (203dpi)
<b>Printing/ Paper width</b>	48mm/58mm
<b>Printing speed</b>	80mm/sec max
<b>Character size , Characters / line</b>	FontA : 24x12dots (1.5x3.0mm) , 32 characters/line FontB : 16x8dots (1.0x2.0mm) , 48 characters/line
<b>Character type</b>	Alphanumeric,International, PC437/850/852/857/858/863/865/866/WPC1252 Katakana
<b>Interface</b>	Serial(RS-232C) / Pararell (Centronics)/ USB (2.0 top speed)
<b>Logo registration</b>	It is available to register the logo data in user memory and flash memory
<b>Barcode</b>	UPC-A/E , JAN13/8 , CODE39 , ITF , CODABAR , CODE128
<b>2-dimensional barcode (option)</b>	QRcode , Maxicode , PDF417 , DataMatrix , MicroPDF417
<b>Input buffer</b>	8k bytes
<b>Emulation</b>	ESC/POS conformity / BL-58 compatible
<b>Operating condition</b>	-10°C-+50°C/10%RH-85%RH (no condensation)
<b>Storage condition</b>	-20°C-+60°C/10%RH-90%RH (no condensation)
<b>Power supply</b>	AC adapter : AC100/120/240V±10% 50/60Hz
<b>Reliability</b>	Life time of head : Wear resistance 50km、 Pulse resistance 100 million pulse
<b>Dimensions</b>	93x125x70 (mm) (WxDxH)
<b>Weight</b>	265g ( paper not included)
<b>EMI conformity</b>	VCCI , CE , FCC
<b>Standard accessory</b>	Paper roll (sample), AC adapter
<b>Optional accessory</b>	Paper roll (sample), AC adapter

\* Windows is the registered trade mark of Microsoft Corporation in the United States and other countries.

\* ESC/POS is the registered trade mark of Seiko Epson Corporation.

\* Specifications is subject to be changed for improvement without notice.

### Option

<b>Thermal paper</b>	P-58-30 (Paper width 58mm · Length 30m)
<b>Li ion battery pack</b>	UR-250 (DC7.4V, 2500mAh, approx. 3 hours operation) UR-121 (DC7.4V, 1700mAh, approx. 2.5 hours operation)
<b>Interface cable</b>	Serial: <a href="#">BL2-S-1.5</a> Parallel: <a href="#">BL2-P-1.5</a> USB: <a href="#">BLE-2U</a>

