



2INCH WSP-BT200

3INCH WSP-BT300



Auto cutting

Auto cutting

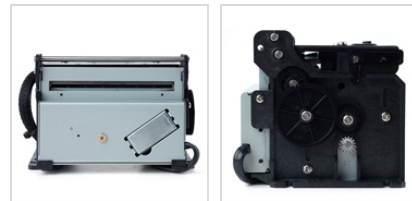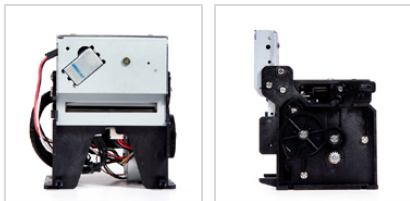

Features

- Very silent printing thru direct thermal printing method
- High speed (150mm/sec)
- UART interface.
- Auto cutting.
- Support text and graphic printing.
- Support bit-image (logo) download.
- Easier paper loading by CLAMSHELL design.
- Easier maintenance with self-diagnostics.

Applications

POS system, Kitchen printer, Electronic scale, EFT-POS, Measuring equipment, Lottery Warehousing and Distribution, Point of sales, Hospitality, Gaming and Healthcare.

Specification

Model	BT200	BT300
Printing method	Direct thermal line printing	
Characters per line	42cpl (MAX)	64cpl (MAX)
Characters size	Eng : 9*24 dots, 12*24dots Kor : 16*24 dots, [24*24 dots]	
Optional Characters	Simplified/Traditional Chinese, Arabic, Cyrillic, Russian, Turkish, Greek, Japanese, Persian, Latin9 and Others upon request.	
Resolution	203 dpi, 8 dots/mm	
Print width	2-inch (56mm, 488dots)	3-inch (72mm, 576dots)
Printing speed	150 mm/sec (MAX)	150 mm/sec (MAX)
Dimensions (mm)	99.8 x 87.1 x 86.3 (111.5)	119.8 x 87.3 x 80.8(111.5)
Weight	533g	619g
Interface	• UART(RS-232C)	
Paper supplied	Thermal roll paper (60-0.5mm wide)	Thermal roll paper (80±0.5mm wide)
	Paper thickness : 60±5µm	
Barcodes	1-dimension:Code128, EAN 128, Code39, I2/5, Code93, UPC, EAN, KAN, JAN, CODABAR 2-dimension:PDF417, QR Code, DATA Matrix	
Driver	Microsoft Windows XP / VISTA / 7 , Windows CE, Linux, Android OS driver compatible	
H/W Spec.	MCU : 32 bits RISC, FLASH : 4Mbytes, RAM : 8MBytes	
Input power	24VDC, MAX 3A	

